


STAINLESS STEEL SINGLE ROLLERCHAIN (B SERIES)

DIN8187 / ISO606

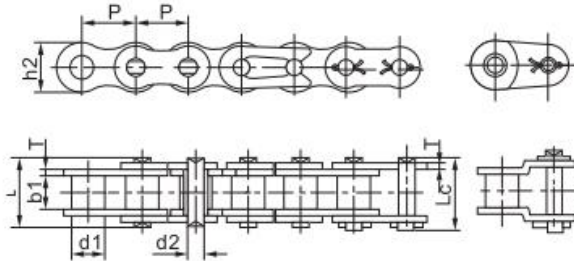

DIN/ISO	Pitch	Roller Diameter	Width Between Inner plates	Pin Diameter	Pin Length		Inner Plate depth	Plate Thickness	Ultimate Tensile Strength	Average Tensile Strength	Weight Per Meter
DIN/ISO Chain NO.	P	d1 max	b1 min	d2 max	L max	Lc max	hc max	T max	Q min	Q0 min	q.
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	Kg/m
SS04B-1	6.000	4.00	2.80	1.85	6.80	7.80	5.00	0.60	2.10	3.2	0.11
SS05B-1	8.000	5.00	3.00	2.31	8.20	8.90	7.10	0.80	3.50	5.9	0.20
SS06B-1	9.525	6.35	5.72	3.28	13.15	14.10	8.20	1.30	6.30	7.2	0.41
SS08B-1	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.60	12.60	15.0	0.69
SS10B-1	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.70	15.68	18.0	0.93
SS12B-1	19.050	12.07	11.68	5.72	22.50	24.20	16.00	1.85	20.30	24.1	1.15
SS16B-1	25.400	15.88	17.02	8.28	36.10	37.40	21.00	4.15/3.1	42.00	49.2	2.71
SS20B-1	31.750	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	66.50	75.5	3.70
SS24B-1	38.100	25.40	25.40	14.63	53.40	57.80	33.20	6.0/4.8	112.00	127.0	7.10
SS28B-1	44.450	27.94	30.99	15.90	65.10	69.50	26.70	7.5/6.0	140.00	180.0	8.50
SS32B-1	50.800	29.21	30.99	17.81	66.00	71.00	42.00	7.0/6.0	175.00	205.0	10.25
SS40B-1	63.500	39.37	38.10	22.89	82.20	89.20	52.96	8.5/8.0	248.50	280.0	16.35
SS48B-1	76.200	48.26	45.72	29.24	99.10	107.00	63.80	12.0/10.0	392.00	460.0	25.00
SS56B-1	88.900	53.98	53.34	34.32	114.60	123.00	77.80	13.5/12.0	595.00	600.0	35.78